

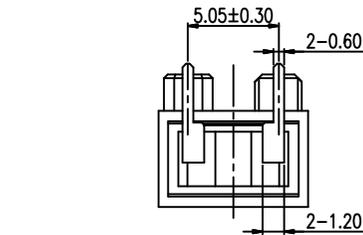


TOTAL TRAVEL POSITION (THE TOP OF THE PLUNGER)
 TERMINAL No. ① - ② ON-OFF OPERATING POSITION (THE TOP OF THE PLUNGER)
 FREE POSITION (THE TOP OF THE PLUNGER)

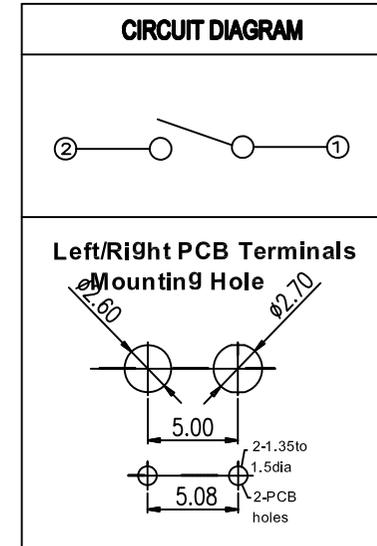

CHARACTERISITICS		CHANGEOVER TIMING: SPST-NO	
OPERATING FORCE:	150gf MAX.(50gf Min.)	IP GRAGE: IP67	
FREE POSITION:	7.9MM MAX.	RATINGS	
OPERATING POSITION:	7.1±0.40MM.	12V DC	0.1A
TOTAL TRAVEL POSITION:	5.1MM MAX.	5V DC	50 μA

A4				
A3				
A2				
A1				
REV.	DATE	REVISION	DESCRIPTION	ISSUE
		A		B

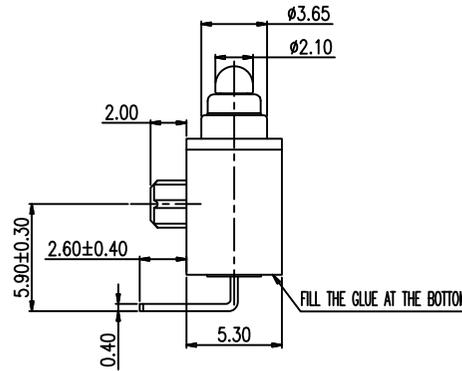

COMMON TOLERANCE:

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP304150U00E44
DATE	2017	APPROVAL BY	ALEN	Https: www.roc pu. tw
ROC PU TECHNOLOGY CO., LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				