



Element face bitmap

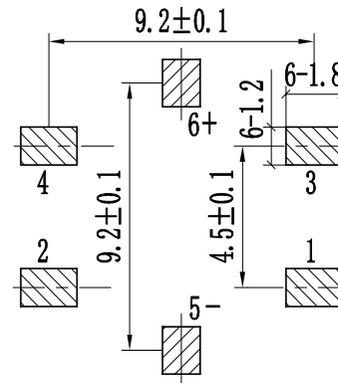


Main Specifications:

Climate Grade: -25 ~+75  
 Rated Values: 30V DC,0.3A  
 Contact Resistance: 0.03  
 Dielectric Strength: 250V AC  
 Insulation Resistance: 100M  
 Operating Force: 260gf ± 50gf  
 Life: 10W times  
 Salt mist Test: 12 ± 1 hours

PRINCIPLE DIAGRAM



Led Color	Part No
Red	TPDD003AR
Blue	TPDD003ABL
Yellow	TPDD003AY
Green	TPDD003AG

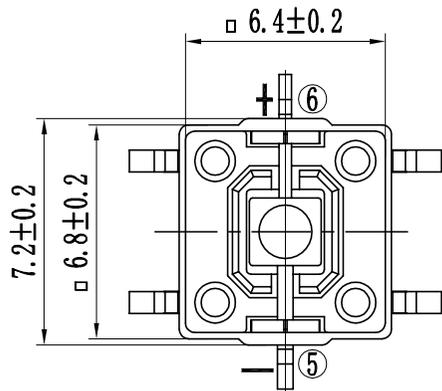

ITEM	PAPT NAME	MATERIAL	QTY	Coating/color
6	LED	ABS	1	transparent
5	Plastic cover	PET	1	transparent
4	Button	PA66	1	Black
3	Shrapnel	Fuyin	1	Ag
2	Pedestal	PA66	1	Black
1	Clasp	H62	1	Ag



COMMON TOLERANCE:

x.xx	± 0.10
x.x	± 0.15
x	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED	PRODUCT NAME:	TPDD003AX
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO:
DATE	2017	APPROVAL BY	ALEN	Https : www.rocpu.com

**ROC PU TECHNOLOGY CO.,LTD**

Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission

REV.	DATE	REVISION DESCRIPTION	ISSUE
A4			
A3			
A2			
A1			