



Element face bitmap



PRINCIPLE DIAGRAM

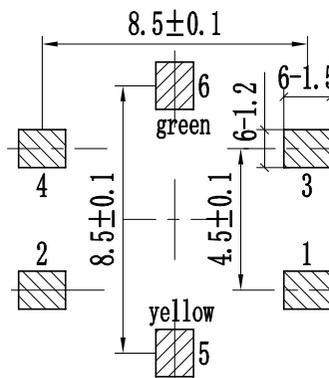

Main Specifications:

Climate Grade: -25 ~+75

Rated Values: 30V DC,0.3A

Contact Resistance: 0.05

Dielectric Strength: 250V AC

Insulation Resistance: 100M

Operating Force: 260gf ± 50gf

Life: 10W times

Salt mist Test: 12 ± 1 hours

| Led Color | Part No |
|-----------|------------|
| Red | TPDD007AR |
| Blue | TPDD007ABL |
| Yellow | TPDD007AY |
| Green | TPDD007AG |

| ITEM | PAPT NAME | MATERIAL | QTY | Coating/color |
|------|-------------------|----------|-----|---------------|
| 7 | Transparent sheet | PVC | 1 | transparent |
| 6 | Square hat | ABS | 1 | Black |
| 5 | LED | | 1 | transparent |
| 4 | Button | PPA | 1 | White |
| 3 | Shrapnel | SUS | 1 | Ag |
| 2 | Pedestal | PPA | 1 | Black |
| 1 | Clasp | H62 | 1 | Ag |

| REV. | DATE | REVISION DESCRIPTION | ISSUE |
|------|------|----------------------|-------|
| A4 | | | |
| A3 | | | |
| A2 | | | |
| A1 | | | |

| | | |
|--|-------------------|--------|
| | COMMON TOLERANCE: | |
| | x.xx | ± 0.10 |
| | x.x | ± 0.15 |
| | x | ± 0.25 |
| | ANGULAR | ——— |

| | | | | | |
|---|--------|-------------|------|---------------|---------------|
| UNIT | MM | PROJECTED | | PRODUCT NAME: | TPDD007AX |
| DRAWN BY | FUYUAN | CHECKED BY | COCO | MODEL NO: | |
| DATE | 2017 | APPROVAL BY | ALEN | Https : | www.rocpu.com |
| <h1>ROC PU TECHNOLOGY CO.,LTD</h1> | | | | | |
| Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission | | | | | |