



Element face bitmap



PRINCIPLE DIAGRAM

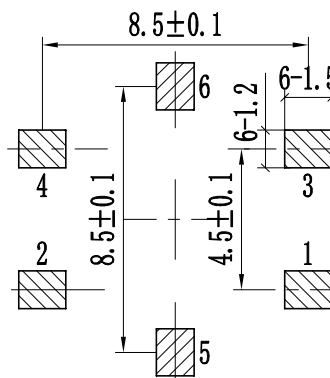

Main Specifications:

Climate Grade: -25 ~+75

Rated Values: 30V DC,0.3A

Contact Resistance: 0.05

Dielectric Strength: 250V AC

Insulation Resistance: 100M

Operating Force: 260gf ± 50gf

Life: 10W times

Salt mist Test: 12 ± 1 hours

Led Color	Part No
Red	TPDD010AR
Blue	TPDD010ABL
Yellow	TPDD010AY
Green	TPDD010AG

ITEM	PAPT NAME	MATERIAL	QTY	Coating/color
6	Transparent hat	ABS	1	transparent
5	LED		1	transparent
4	Button	PPA	1	White
3	Shrapnel	SUS	1	Ag
2	Pedestal	PPA	1	Black
1	Clasp	H62	1	Ag

REV.	DATE	REVISION DESCRIPTION	ISSUE
A4			
A3			
A2			
A1			



COMMON TOLERANCE:

x.xx ± 0.10

x.x ± 0.15

x ± 0.25

ANGULAR

UNIT	MM	PROJECTED	PRODUCT NAME:	TPDD010AX
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO:
DATE	2017	APPROVAL BY	ALEN	Https : www.rocpu.com
ROC PU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				